

# SECURITY & ANTI-LIGATURE PRODUCTS



## ML332\_AL

750mm Anti-Ligature Straight Grab Rail in Satin Stainless Steel




### Specification

Material	#304 Stainless Steel - 32mmØ 2.0mm Thick Stainless Steel InFill Plate
Finish	Satin Stainless Steel
Mounting	Screw Fix - Multiple Points
Also Available	ML327_AL - 300mm C to C ML330_AL - 450mm C to C ML331_AL - 600mm C to C ML332_AL - 750mm C to C ML333_AL - 900mm C to C ML336_AL - 1500mm C to C

**Note** \*It is the responsibility of the installer to ensure that the surface/substrate that the unit is installed upon and the fixings used are suitable to withstand the weight bearing loads of the unit and if required as per AS1428 / Australian building code regulations.

\*The materials and construction of this grab rail meets AS1428.1 force requirements to be able to withstand a force of 1100Nm applied at any position and in any direction without deformation.

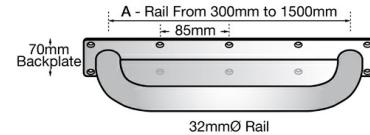

### Downloads & Resources

- Care & Maintenance
- Installation instructions
- Associated Videos
- Stainless Steel Cleaning & Maintenance

The photographs and line drawings of the products presented above are representational only. Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions.